

Product  
Pole

**Contacts: 5, Cable plug connector, overmoulded, shielded**  
5


Area  
Article number

**M12-A Series 763**  
**77 3529 0000 50705-0200**


### Illustration



### Scale drawing

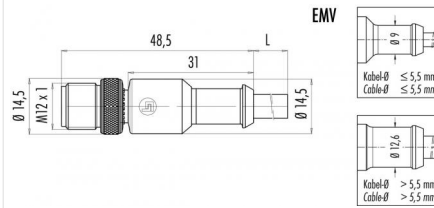


### Contact Arrangement



- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black
- 5 grau/grey

### Attenuation characteristic

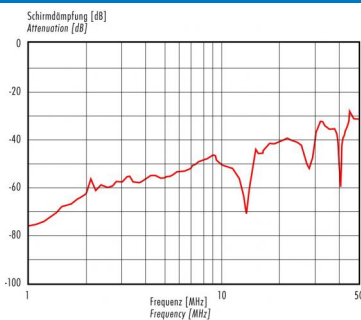

## Technical data

### Common values

Connector Design	Cable plug connector
Connector locking system	screw
Termination	crimp, injection-moulded cable
Wire gauge (mm)	0.25 mm <sup>2</sup>
Wire gauge (AWG)	24
Upper temperature	85 °C
Lower temperature	-25 °C

### Electrical values

Rated voltage	125 V
Rated impulse voltage	1500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
EMV compliance	geschirmt
Degree of protection	IP67
Mechanical operation	> 100 mating cycles

### Material

Material of contact	CuZn (Brass)
Contact plating	Au (Gold)
Material of contact body	PUR
Material of housing	PUR

Kopie von Polzahl: 5, Kabellänge 2 m, Kabel: 5 x 0,25 mm<sup>2</sup>, PUR, Kabelstecker umspritzt, geschirmt

Product	<b>Contacts: 5, Cable plug connector, overmoulded, shielded</b>	Area	<b>M12-A Series 763</b>
Pole	<b>5</b>	Article number	<b>77 3529 0000 50705-0200</b>

## Technical data

### Cable data

material housing	PUR
Insulation single lead	PUR
Single lead structure	14 x 0.16
Cable sheath Ø	5.3
Conductor resistance	75.5Ω/Km
Temperature range cable movable c from	-5
Temperature range cable movable c to	70
Temperature range cable fixed c from	-25
Temperature range cable fixed c to	70
Bending radius cable fixed	60 mm
Bending radius cable movable	120 mm