

Product  
Pole

**Contacts: 8, Cable plug connector, overmoulded, shielded**  
**8**


Area  
Article number

**M12-A Series 763**  
**77 3529 0000 50708-0500**

### Illustration




### Scale drawing

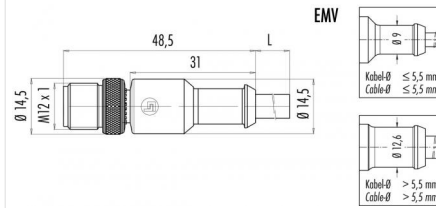

### Contact Arrangement

geschirmt/ shielded	nicht geschirmt/ not shielded
1 weiß/white	1 weiß/white
2 braun/brown	2 braun/brown
3 grün/green	3 grün/green
4 gelb/yellow	4 gelb/yellow
5 grau/grey	5 grau/grey
6 rosa/pink	6 rosa/pink
7 blau/blue	7 blau/blue
8 rot/red	8 Schirm/shield
Gehäuse-Schirm/ Housing-shield	

### Attenuation characteristic

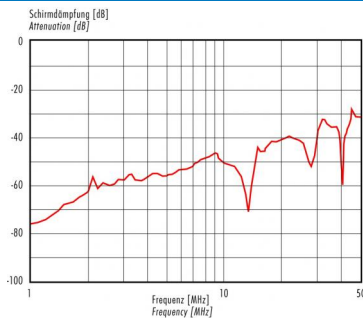

## Technical data

### Common values

Connector Design	Cable plug connector
Connector locking system	screw
Termination	crimp, injection-moulded cable
Wire gauge (mm)	0.25 mm <sup>2</sup>
Wire gauge (AWG)	24
Upper temperature	85 °C
Lower temperature	-25 °C

### Electrical values

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	2 A
Volume resistivity	≤ 3 mΩ
EMV compliance	geschirmt
Degree of protection	IP67
Mechanical operation	> 100 mating cycles

### Material

Material of contact	CuZn (Brass)
Contact plating	Au (Gold)
Material of contact body	PUR
Material of housing	PUR

Contacts: 8, Cable length 5 m, cable: 8 x 0.25 mm<sup>2</sup>, PUR, cable plug connector, overmoulded, shielded

Product	<b>Contacts: 8, Cable plug connector, overmoulded, shielded</b>	Area	<b>M12-A Series 763</b>
Pole	<b>8</b>	Article number	<b>77 3529 0000 50708-0500</b>

## Technical data

### Cable data

material housing	PUR
Insulation single lead	PUR
Single lead structure	19 x 0.127
Cable sheath Ø	6
Conductor resistance	73Ω/Km
Temperature range cable movable c from	-5
Temperature range cable movable c to	70
Temperature range cable fixed c from	-25
Temperature range cable fixed c to	70
Bending radius cable fixed	60 mm
Bending radius cable movable	120 mm