


Product **female panel mount connector SMT, shieldable**

Area **M12-B Series 715/766**
Article number **09 0442 601 04**


Illustration



Scale drawing

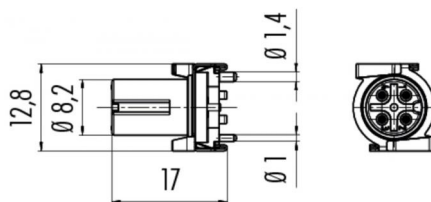

Contact Arrangement



| | X | Y |
|---|-------|-------|
| 1 | -2,50 | 0,00 |
| 2 | 0,00 | 2,50 |
| 3 | 2,50 | 0,00 |
| 4 | 0,00 | -2,50 |

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black

Technical data

General features

Termination SMT
Upper temperature -40 °C
Lower temperature 85 °C

Electrical parameters

Rated impulse voltage 2500 V
Pollution degree 3
Overvoltage category II
Material group III
EMV compliance shieldable
Degree of protection IP67
Mechanical operation > 100 Mating cycles